








AXIpremium XXL HC

530 - 555 Wp


High performance solar module
144 halfcell, monocrystalline

The advantages:

- 
15 years Manufacturer's warranty
- 
High module performance through Half-Cut-technology and selected materials
- 
Guaranteed positive power tolerance from 0-5 Wp by individual measurement
- 
100% visual electroluminescence inspection in production
- 
High stability due to innovative frame design
- 
High quality junction box and connector systems
- 
25 years Performance guarantee



Exclusive linear AXITEC high performance guarantee!

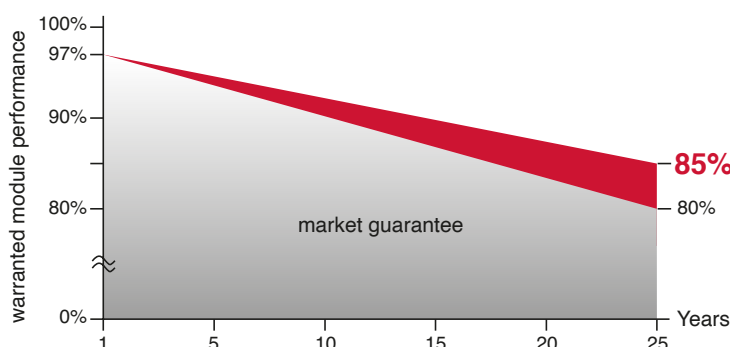

85% AXITEC Warranty Added Value: up to 5% more power after 25 years

AXIpremium XXL HC 530 - 555 Wp

Electrical data (at standard conditions (STC) irradiance 1000 watt/m², spectrum AM 1.5 at a cell temperature of 25°C)

Type	Nominal output Pmpp	Nominal voltage Umpv	Nominal current Impv	Short circuit current Isc	Open circuit voltage Uoc	Module conversion efficiency
AC-530MH/144V	530 Wp	41.40 V	12.81 A	13.73 A	49.25 V	20.52 %
AC-535MH/144V	535 Wp	41.55 V	12.88 A	13.79 A	49.40 V	20.71 %
AC-540MH/144V	540 Wp	41.70 V	12.95 A	13.85 A	49.55 V	20.90 %
AC-545MH/144V	545 Wp	41.85 V	13.03 A	13.91 A	49.70 V	21.10 %
AC-550MH/144V	550 Wp	41.96 V	13.11 A	14.00 A	49.90 V	21.28 %
AC-555MH/144V	555 Wp	42.11 V	13.18 A	14.07 A	50.05 V	21.48 %

Design

Frontside	3.2 mm hardened, low-reflection white glass
Cells	144 monocrystalline high efficiency cells
Backside	Composite film
Frame	35 mm silver aluminium frame

Mechanical data

L x W x H	2278 x 1134 x 35 mm
Weight	28.5 kg with frame

Mechanical load

Design load (pressure/suction)	3600 Pa / 1600 Pa *
Test load (pressure/suction)	5400 Pa / 2400 Pa *

* depending on the type of installation according to the installation instructions

Power connection

Socket	Protection Class IP68, 3 bypass diodes
Wire	approx. 1.3 m, 4 mm ²
Plug-in system	IP68, MC4-EVO 2, MC4-EVO 2A, JM608

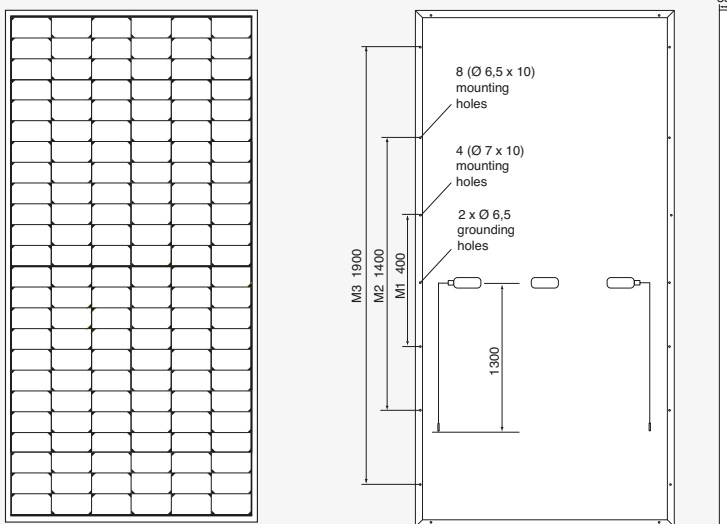


Fig. principle sketch

All dimensions in mm

Limit values

System voltage	1500 VDC
NOCT (nominal operating cell temperature)*	45°C +/-2K
Reverse current feed IR	25.0 A

Permissible operating

temperature	-40°C to 85°C / -40F to 185F
Fire class / Protection class	C (UL790) / II

(No external voltages greater than Uoc may be applied to the module)

* NOCT, irradiance 800 W/m²; AM 1.5; wind speed 1 m/s; Temperature 20°C

Temperature coefficients

Voltage Uoc	-0.28 %/K
Current Isc	0.045 %/K
Output Pmpp	-0.35 %/K

Low-light performance (Example for AC-555MH/144V)

I-U characteristic curve	Current Imp	Voltage Upp
200 W/m ²	2.69 A	40.53 V
400 W/m ²	5.43 A	40.99 V
600 W/m ²	8.12 A	41.31 V
800 W/m ²	10.73 A	41.67 V
1000 W/m ²	13.18 A	42.11 V

Packaging

Module pieces per pallet	31
Module pieces per HC-container	620

