



AC-260M/156-60S
 AC-265M/156-60S
 AC-270M/156-60S
 AC-275M/156-60S
 AC-280M/156-60S

www.axitecsolar.us

AXITEC[®]
 high quality german solar brand

AXIblackpremium

60 cell/monocrystalline photovoltaic modules
 High performance photovoltaic modules



German engineered – made for America



12 Years
 12 years manufacturer's warranty
 Two more years than industry standard



A-Max
 Highest performance due to specifically selected technologies and materials



Wp
 Positive power tolerance from 0-5 Wp
 Higher guaranteed yield



113 PSF
 Snow load of up to 113 psf
 Stable module for a long life in extreme conditions



100%
 100 % electroluminescence inspection
 Micro crack and hotspot free modules



Soft Grip
 Axitec-Soft-Grip-Seam aluminum frame
 Higher stability and easier handling




IP 67
 High quality junction box and connector system for a longer life time



Fig. similar 60M156USA160531A

Exclusive linear AXITEC high performance guarantee!

- 15 years manufacturer's guarantee on 90% of the nominal performance
- 25 years manufacturer's guarantee on 85% of the nominal performance
- Warrants around 6 % more than the market standard

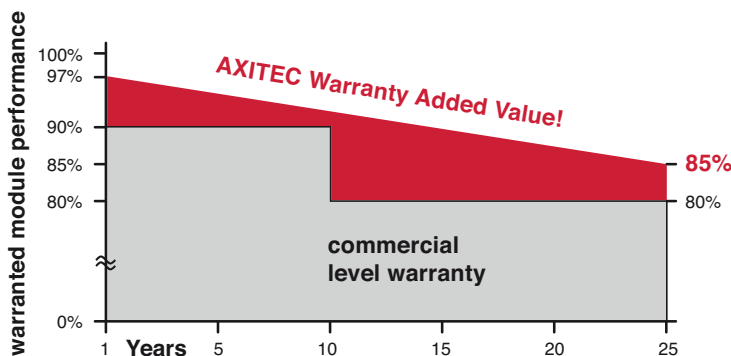

Module Fire Performance:
 TYPE 1 (UL 1703)
 CLASS C (IEC61730)

Distributed by:

Electrical data (at standard conditions (STC) irradiance 1000 watt/m², spectrum AM 1.5 at a cell temperature of 25°C)

Type	Nominal output P _{mpp}	Nominal voltage U _{mpp}	Nominal current I _{mpp}	Short circuit current I _{sc}	Open circuit voltage U _{oc}	Module conversion efficiency
AC-260M/156-60S	260 Wp	30.42 V	8.60 A	9.06 A	38.30 V	15.98 %
AC-265M/156-60S	265 Wp	30.85 V	8.65 A	9.20 A	38.42 V	16.29 %
AC-270M/156-60S	270 Wp	30.94 V	8.80 A	9.41 A	39.26 V	16.60 %
AC-275M/156-60S	275 Wp	31.20 V	8.86 A	9.50 A	39.32 V	16.90 %
AC-280M/156-60S	280 Wp	31.50 V	8.95 A	9.55 A	39.45 V	17.21 %

Design


Frontside	0.13 inch (3.2 mm) hardened, low-reflection white glass
Cells	60 monocrystalline high efficiency cells 6 inch (156 x 156 mm)
Backside	Composite film
Frame	1.38 inch (35 mm) black anodized aluminium frame

Mechanical data

L x W x H	64.57 x 39.06 x 1.38 inch (1640 x 992 x 35 mm)
Weight	39.68 lbs (18.0 kg) with frame

Power connection

Socket	Protection Class IP65 (3 bypass diodes)
Wire	43.3 inch, AWG 11
Plug-in system	Plug/socket IP67

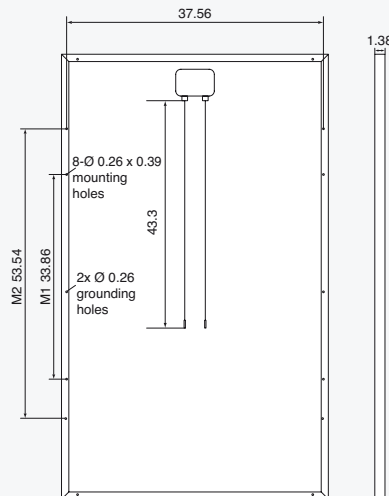

All dimensions in inch

Limit values

System voltage	1000 VDC (UL) 1000 VDC (IEC)
NOCT (nominal operating cell temperature)*	45°C +/-2K
Max. load-carrying capacity	113 PSF
Reverse current feed IR	15.0 A
Permissible operating temperature	-40°C to 85°C / -40F to 185F

(No external voltages greater than V_o may be applied to the module)

* NOCT, irradiance 800 W/m²; AM 1,5; wind speed 1 m/s; Temperature 20°C

Temperature coefficients

Voltage U _{oc}	-0.30 %/K
Current I _{sc}	0.04 %/K
Output P _{mpp}	-0.40 %/K

Low-light performance (Example for AC-260M/156-60S)

I-U characteristic curve	Current I _{pp}	Voltage U _{pp}
200 W/m ²	1.71 A	30.00 V
400 W/m ²	3.41 A	30.10 V
600 W/m ²	5.18 A	30.18 V
800 W/m ²	6.89 A	30.36 V
1000 W/m ²	8.60 A	30.42 V

Packaging

Module pieces per pallet	30
Module pieces per HC-container	840