



360 - 375 Wp

AXIpremium XL HC BLK

High performance solar module
120 halfcell, monocrystalline



German-American-Engineering

The advantages:



15 years Manufacturer's warranty



High module performance through
Half-Cut-technology and selected materials



Guaranteed positive power tolerance
from 0-5 Wp by individual measurement



100 % visual electroluminescence inspection
in production



High stability due to innovative frame design




High quality junction box
and connector systems



Fig. similar 120MHUSA210203A

Exclusive linear AXITEC high performance guarantee!

- 15 years manufacturer's guarantee on 90% of the nominal performance
- 25 years manufacturer's guarantee on 85% of the nominal performance

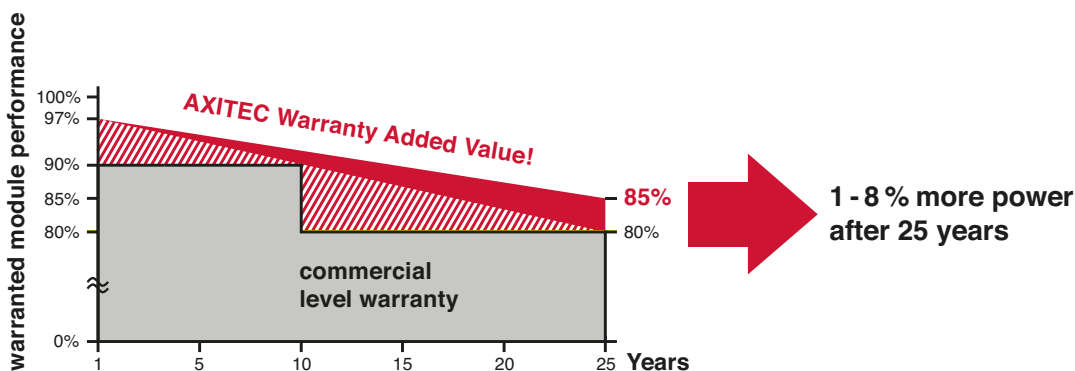

(PHOTOVOLTAIC MODULE
OVER 600 VOLTS) 5JK4
E487509

AXIpremium XL HC BLK 360 - 375 Wp

Electrical data (at standard conditions (STC) irradiance 1000 watt/m², spectrum AM 1.5 at a cell temperature of 25°C)

Type	Nominal output P _{mpp}	Nominal voltage U _{mpp}	Nominal current I _{mpp}	Short circuit current I _{sc}	Open circuit voltage U _{oc}	Module conversion efficiency
AC-360MH/120V	360 Wp	34.00 V	10.59 A	11.35 A	40.50 V	19.76 %
AC-365MH/120V	365 Wp	34.20 V	10.68 A	11.43 A	40.70 V	20.04 %
AC-370MH/120V	370 Wp	34.40 V	10.76 A	11.52 A	40.90 V	20.31 %
AC-375MH/120V	375 Wp	34.60 V	10.84 A	11.60 A	41.10 V	20.59 %

Design

Frontside	0.13 inch (3.2 mm) hardened, low-reflection white glass
Cells	120 monocrystalline high efficiency cells
Backside	Composite film
Frame	1.38 inch (35 mm) black aluminium frame

Mechanical data

L x W x H	69.09 x 40.87 x 1.38 inch (1755 x 1038 x 35 mm)
Weight	42.99 lbs (19.5 kg) with frame

Mechanical load

Design load (pressure/suction)	75.3 PSF / 33.3 PSF
Test load (pressure/suction)	113 PSF / 50 PSF

Power connection

Socket	Protection Class IP68
Wire	47.24 inch, AWG 11
Plug-in system	Plug/socket IP68, Stäubli EVO2

Limit values

System voltage	1500 VDC (UL) 1500 VDC (IEC)
Module Fire Performance	TYPE 1 (UL 1703) or CLASS C (IEC 61730)
NOCT (nominal operating cell temperature)*	45°C +/-2K
Reverse current feed IR	20.0 A

Permissible operating temperature	-40°C to 85°C / -40F to 185F
-----------------------------------	------------------------------

(No external voltages greater than Vo may be applied to the module)

* NOCT, irradiance 800 W/m²; AM 1.5; wind speed 1 m/s; Temperature 20°C

Temperature coefficients


Voltage U _{oc}	-0.27 %/K
Current I _{sc}	0.048 %/K
Output P _{mpp}	-0.35 %/K

Low-light performance (Example for AC-375MH/120V)

I-U characteristic curve	Current I _{pp}	Voltage U _{pp}
200 W/m ²	2.21 A	33.30 V
400 W/m ²	4.47 A	33.68 V
600 W/m ²	6.68 A	33.95 V
800 W/m ²	8.83 A	34.24 V
1000 W/m ²	10.84 A	34.60 V

Packaging

Module pieces per pallet	30
Module pieces per HC-container	780

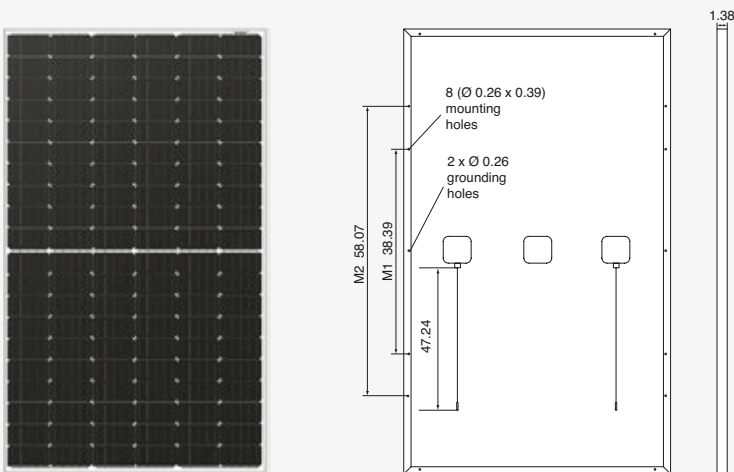

All dimensions in inch